


## LLS-0473 Low-Noise DPSS Laser System

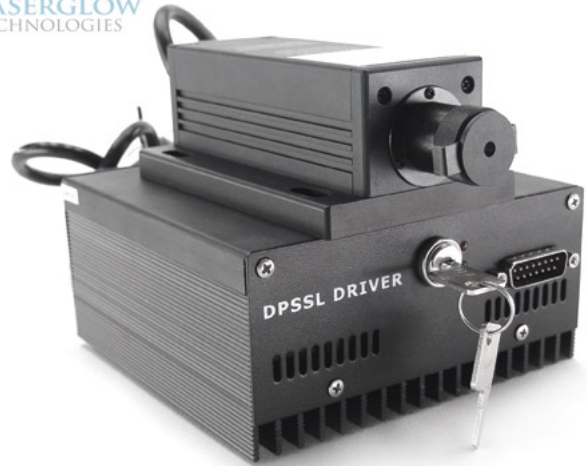

### Series Specifications:

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 473 nm |
| Output Type        | CW     |
| Laser Source Type  | DPSS   |

### Overview:

The LLS-0473 Series of Low-Noise Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring less than 1% noise (high frequency power variations) and output power levels from 5 mW to >500 mW. These 473 nm lasers maintain a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for fluorescence excitation, PIV, Raman Spectroscopy, and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

### Key Features:

- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

### Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- Keys, Safety Interlock
- Hard-shell Carrying Case

## Specifications:

This spec sheet has been generated specifically for part number L47-UU, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to L47-UU have been highlighted below in **red + bold**.

|   |  |   |
|---|--|---|
| Laser Form Factor                               | O  | <b>UU</b>   |
| Output Power (mW)                               | <5, >30, >50, >100, >200, >300, >400, >500 | <b>&lt;5, &gt;10, &gt;20, &gt;50, &gt;100, &gt;200, &gt;300, &gt;400, &gt;500</b> |
| Output Power Stability (%RMS/4h)                | <2, <3, <5                                 | <b>&lt;2, &lt;3, &lt;5</b>  |
| FDA Safety Class                                | IIIa, IIIb, IV                             | <b>IIIa, IIIb, IV</b>   |
| Central Wavelength (nm)                         | 472.58                                     | <b>472.58</b>   |
| Wavelength Tolerance (+/- nm)                   | 1  | <b>1</b>  |
| Divergence (mrad, full angle)                   | <1.5                                       | <b>&lt;1.5</b>  |
| Beam Dimensions (mm, 1/e <sup>2</sup> )         | 2, 3                                       | <b>0.7</b>  |
| Transverse Mode                                 | Near TEM00                                 | <b>TEM00</b>  |
| Longitudinal Modes                              | Multiple                                   | <b>Multiple</b>   |
| Warm-up Time (minutes)                          | 10   | <b>10</b>   |
| Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz) | <1   | <b>&lt;0.5</b>  |
| Spectral Linewidth (nm)                         | <0.2                                       | <b>&lt;0.003</b>  |
| M <sup>2</sup>                                  | <1.5                                       | <b>&lt;1.2</b>  |
| Polarization Ratio                              | >100                                       | <b>&gt;100</b>  |
| Beam Pointing Stability (mrad)                  | <0.05                                      | <b>&lt;0.05</b>   |
| Operating Temperature Range (°C)                | 10 to 35                                   | <b>10 to 40</b>   |
| Storage Temperature Range (°C)                  | -10 to                                     | <b>-10 to 50</b>  |
| Max. TTL Modulation Freq. (Hz)                  | 500  | <b>500</b>  |
| Modulation Input Signal                         | 0-5 VDC                                    | <b>0-5 VDC</b>  |
| Total Power Consumption (W)                     | 22, 32, 80                                 | <b>22</b>   |
| Max. Power Input Duty Cycle                     | 100%                                       | <b>100%</b>   |
| Cooling Method                                  | TEC  | <b>TEC</b>  |
| Standard Warranty (months)                      | 12   | <b>12</b>   |
| MTTF (operational hours)                        | 10000                                      | <b>10000</b>  |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Specifications Page 2:


|  |                           |                                    |
|--|---------------------------|------------------------------------|
| Laser Form Factor                        | O                         | <b>UU</b>                          |
| Weight of Product or Laser Head (kg)     | 2                         |                                    |
| Beam Height from Base Plate (mm)         | 27.4                      | <b>27.4</b>                        |
| Dimensions of Product or Laser Head (mm) | 197 (l) x 70 (w) x 50 (h) | <b>142.5 (l) x 60 (w) x 50 (h)</b> |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.


|   | Power Supply Type:       | SO                          | SH                          |
|---|--------------------------|-----------------------------|-----------------------------|
|  | FDA-Compliant Standard   |                             |                             |
|   | Input Power              | 85v to 264v                 | 85v to 264v                 |
|   | Power Supply Weight (kg) | 2.3                         | 2.3                         |
|   | Dimensions (mm)          | 238 (l) x 146 (w) x 102 (h) | 238 (l) x 146 (w) x 102 (h) |

\*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.





\*Dimensions for fiber-integrated (I\_) include laser head packaged inside.

## Regulatory Classification:

The model you have selected (L47-UU) requires the following safety label(s):

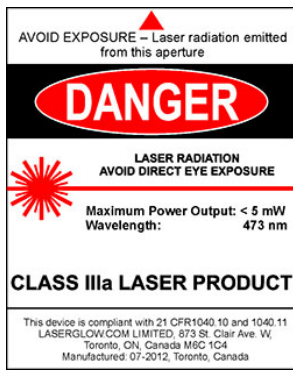

**Dimensional Drawing - Power Supply Form Factor: SH:**

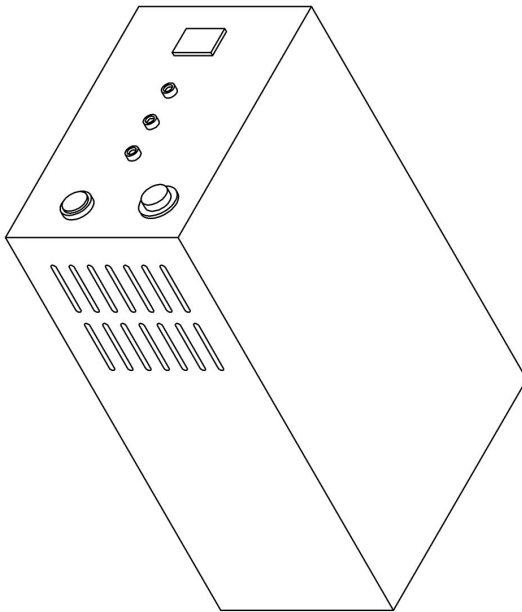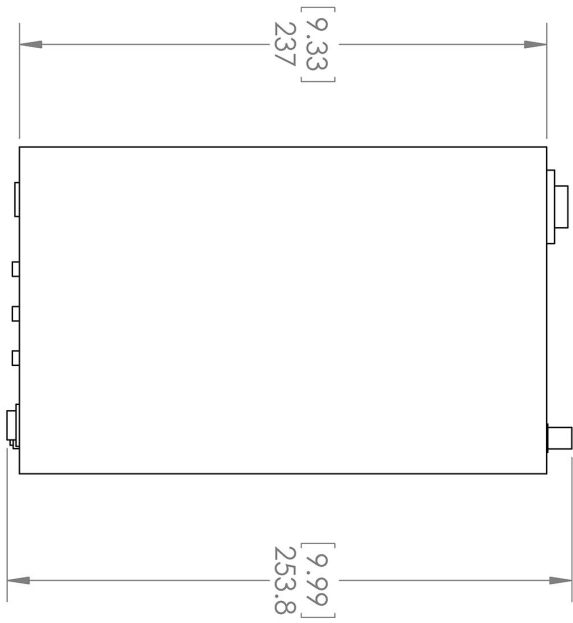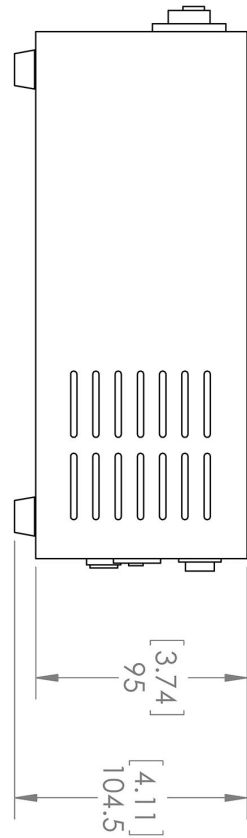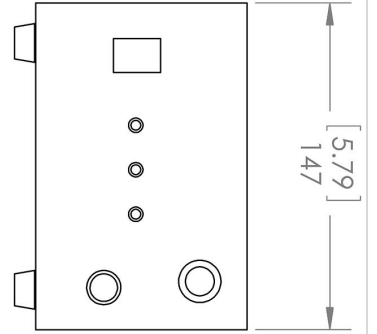

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MM(INCH)  
 TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

**Laserglow Technologies**

TITLE:

**Power Supply  
 SH/SF/SN**








REV  
**1**

SCALE: 1:3

SHEET 1 OF 1

## Accessories:

The most popular accessories for model L47-UU are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number  | Description   |                     |
|--|---|---------------------|
| <br>AGF5327XX   | LSG-532-NF-7 Fit-Over Safety Goggles 532nm<br>Output: OD 7+ at 190-532 nm<br>CE Certified<br>Full Details: <a href="http://www.laserglow.com/AGF">www.laserglow.com/AGF</a>   |                     |
| <br>ACFVISHXA   | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.laserglow.com/ACF">www.laserglow.com/ACF</a>   |                     |
| <br>ACSVISHXA   | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.laserglow.com/ACS">www.laserglow.com/ACS</a> |                     |
| <br>ACALBHFXX   | Carrying Case-103<br>Holds Lab/OEM H, F and O size Standard/LabSpec laser<br>Full Details: <a href="http://www.laserglow.com/ACA">www.laserglow.com/ACA</a>   | Included With Laser |
| <br>AFS2002XX | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length<br>Full Details: <a href="http://www.laserglow.com/AFS">www.laserglow.com/AFS</a>   |                     |
| <br>AFF2002XX | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length<br>Full Details: <a href="http://www.laserglow.com/AFF">www.laserglow.com/AFF</a>  |                     |
| <br>TBK       | Complete optics kits with breadboard mounting hardware.<br>External modulators, variable attenuators, free-space fiber launch systems<br>Full Details: <a href="http://www.laserglow.com/TBK">www.laserglow.com/TBK</a> |                     |

## FOR MORE INFORMATION PLEASE CONTACT:

LASERGLOW TECHNOLOGIES  
873 St. Clair Ave West, Toronto, ON, Canada M6C1C4  
Tel. (416) 729-7976 Fax (480) 247-4864  
[sales@laserglow.com](mailto:sales@laserglow.com) [www.laserglow.com](http://www.laserglow.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.